

MIR3D

High Performance Cost-Effective Area Imager Barcode Scanning Module

CHAMPTEK[®]
We value your ID's

Introduction

The MIR3D is a high performance, omni-directional area imager barcode scanning module. It delivers the high-quality when your products need to capture 1D and 2D bar codes, its good ability to read bar codes that are printed on paper labels or displayed on the screen of a mobile phone or computer; and the rapid scanning speed that protects worker productivity and customer experience. With the MIR3D, you can create products that will make a difference for your customers – and their customers. It is designed for various built-in OEM solutions, such as self-service kiosks, POS(Point-of-Sales) terminals, ATM and mobile device solutions etc.

Numerous features make it easy to integrate the MIR3D ,from two mounting areas options, keep imager on PCB board or standalone with a FPC to connect with board, and through documentation to a scan engine development board. With a multitude of software configuration through Idea set utility, you can easily optimize the performance of the MIR3D for your application.

MIR3D module is a high performance area imager scanner, provides customers with the most cost-effective solution in the market and perfectly suitable and definitely the best choice for any OEM and built-in application.


Features

- Omni-directional scan pattern, no need to align barcode and scanner, ensuring user comfort and protecting worker productivity.
- Easily integrated with various OEM application while 1D and 2D barcode scanning.
- Focused Green-coloured crisp square 'spot' for accurate aiming and first time barcode capture.
- Flexible mounting options, either mounting on external or inner screw holes.
- With a multitude of software configuration options, you can easily optimize the performance of the MIR3D for your application.

MIR3D

Reading Range

| Barcode mil | Depth of field |
|-------------------|----------------|
| 4mil Code39 | 60~100 mm |
| 20mil Code39 | 60~200 mm |
| 20mil QRCode | 70~150 mm |
| 20mil PDF417 | 70~150 mm |
| 20mil Data Matrix | 70~130 mm |

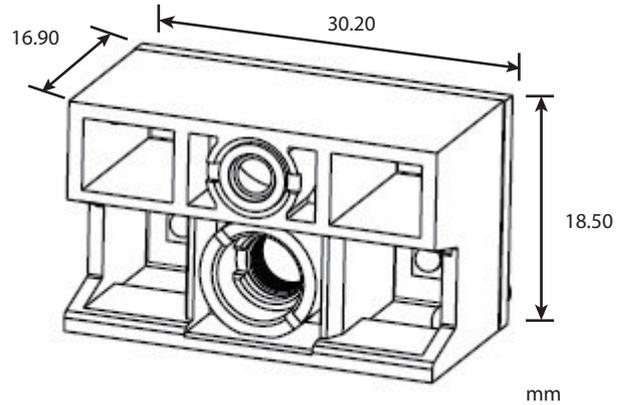

Specifications

Physical Characteristics

Weight


Body weight Approx. 0.67 oz (19.2g)

USB Cable weight Approx. 1.79 oz (51g)

RS232 Cable weight Approx. 2.32 oz (66g)

Material Polycarbonate

Dimension

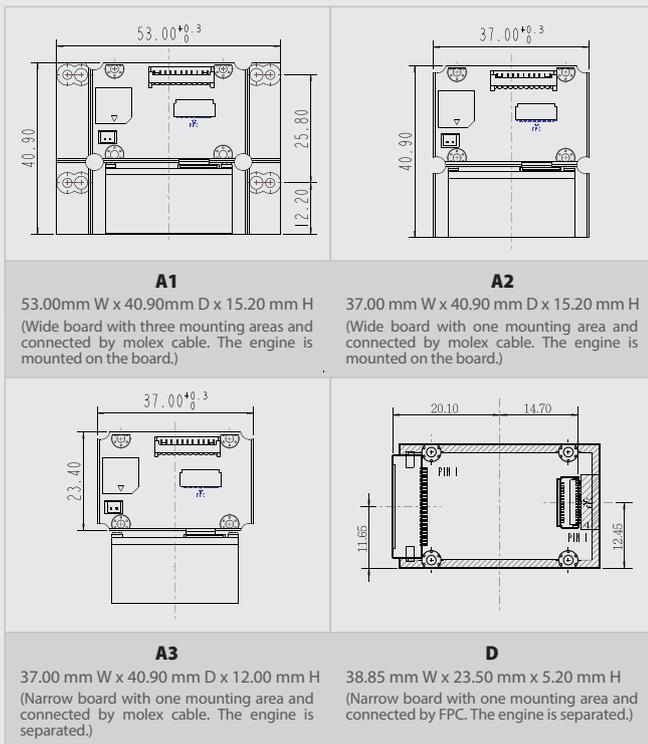

Electrical Characteristics

| Interface | RS232 | USB-HID(or Virtual COM port) |
|------------------|------------|------------------------------|
| | DC Adaptor | USB Power |
| Supply Voltage | DC+5V±5% | DC+5V±5% |
| Current Draw | ±10% | ±10% |
| Stand by (Typ.) | 180mA | 180mA |
| Operation (Typ.) | 380mA | 380mA |

Environmental

Operating Temp. 0°C to 50°C (32°F to 122°F)

Storage Temp. -20°C to 70°C (-4°F to 158°F)

Relative Humidity 20% to 95% (Non-condensing)

Ambient Light Works in any lighting conditions from 0 to 100,000 lux

Performance

Light Source White Light LED

Scan Rate 60 images per second

Sensor Resolution 752 (H) x 480 (V) pixels

Field of View Horizontal -40°, Vertical -25°

Pitch Angle 5°~60°(±5°)

Skew Tolerance 5°~60°(±5°)

Roll 360°

Indicator Good read beep

Reliability

Life Time

MTBF(Calculated) 50,000 hours

Thermal Shock

Low Temp. -20°C (-4°F)

Cycle time 30 minutes for high temp.,
30 minutes for low temp.

Cycles 24 cycles

Mechanical Shock

2000G,0.7ms,half sinus,3axes'

Vibration

8G r.m.s,from 10 to 500Hz,2 hours per axis, 3 axes

Readable Symbologies

1D Symbologies

UPC-A,UPC-E,EAN-8/JAN-8,EAN-13/JAN-13,Code 39,Code 128, Interleaved 25,Industrial 25,Matrix 25,Codabar/NW7, Code 93,China Post,MSI/Plessey,Telepen,GS1 Databar Omni-directional, GS1 Databar Limited,GS1 Databar Expanded

2D Symbologies

Data Matrix,PDF 417,QR Code

Option :

Aztec,Micro PDF 417,Micro QR Code,Han Xin Code,GM Code

Due to Champtek's / Scantech ID's continuing product improvement programs, specifications and features are subject to change