

SPECIFICATION

Customer : _____

Customer's Model No. : _____

Model No. : **MCR14S CMOS Bar Code Scanning Module**

Date : _____

Sample Serial No. : _____

Spec. Version & Revision Date: V04 2022.01.17

Received/Approved by

CHAMPTEK[®]

ChampTek Incorporated

5/F, No. 2, Alley 2, Shih-Wei Lane, Chung Cheng Rd.,

Hsin Tien District, New Taipei City, Taiwan, R.O.C.

Web : <http://www.champtek.com>

Tel : 886-2-22192385

E-mail : sales@champtek.com

Fax : 886-2-22192387

Revision History

Version	Date	Context
V00	2011.11.18	Golden release
V01	2011.12.12	Update Scan Map
V02	2012.10.03	Update Trigger Command
V03	2018.02.26	Performance update
V04	2022.01.17	Update Interface Cable

TABLE OF CONTENTS


A.	General Description	1
B.	Physical Characteristics	2
C.	Several combination options for choice,.....	2
D.	Electrical Characteristics.....	6
E.	Performance	7
F.	Environmental.....	7
G.	Readable Symbologies.....	8
H.	Trigger Command	9
I.	Scan Map.....	9
J.	Reliability.....	10

Due to Champtek's continuing product improvement programs, specifications and features are subject to change without notice.

A. General Description

The MCR Series brings the benefits of bar code scanning to a variety of OEM devices.

The MCR Series Scan Module is a perfect choice for your OEM design. The MCR Series brings the benefits of bar code scanning to all types of OEM devices. Now kiosks, medical instruments, diagnostic equipment, lottery terminals, vending machines and countless other appliances can all be equipped with the leading-edge scanning technology and reliability.

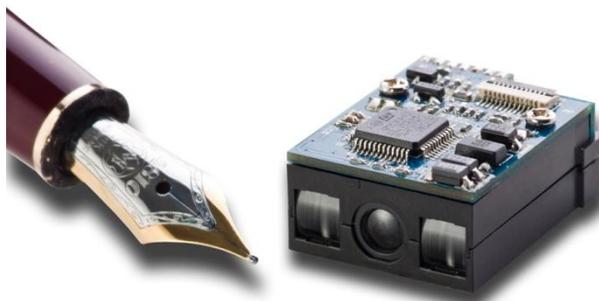

The MCR Series has been designed to provide the highest scanning performance in the smallest package possible. For added versatility, allowing for fast, cost-effective interchangeability when upgrading or modifying your OEM device for specialized applications.

MCR14S is a CMOS bar code decoding capabilities. MCR14S decode board is powered by a fast processor and to decode a wide array of 1D bar codes. The decode board is compatible with Utility, a PC-based software for easy Configuration.

The MCR14S is designed with the industrial standard size, mounting options and output to facilitate integration into existing applications. The Scanner module's miniature size makes MCR14S ideal for integration into data terminals and other small devices. MCR14S is supplied as an assembled module with a mounting bracket or as separate components for custom mounting.

B. Physical Characteristics


Weight	
Body weight	Approx. 7g / 0.25oz (w/o test board)
Material	
	ABS+ Glass Reinforced Plastic
Connector	
	FPC 12pin Pitch 0.5
Dimension	
	20mm W x 11.5mm H x 25mm L

C. Several combination options for choice,


1. MCR14S scan body only without interface board, to connect to your device through a **FPC** cable, have USB HID (or VCOM) or UART as option.
2. MCR14S scan body with Interface board, to connect to your device through an Interface cable , have RS232 or USB HID (or VCOM) interface cable as option.

C.1 MCR14S Scan Body ONLY with FPC interface

C.1.1 Mechanical drawing Unit : mm

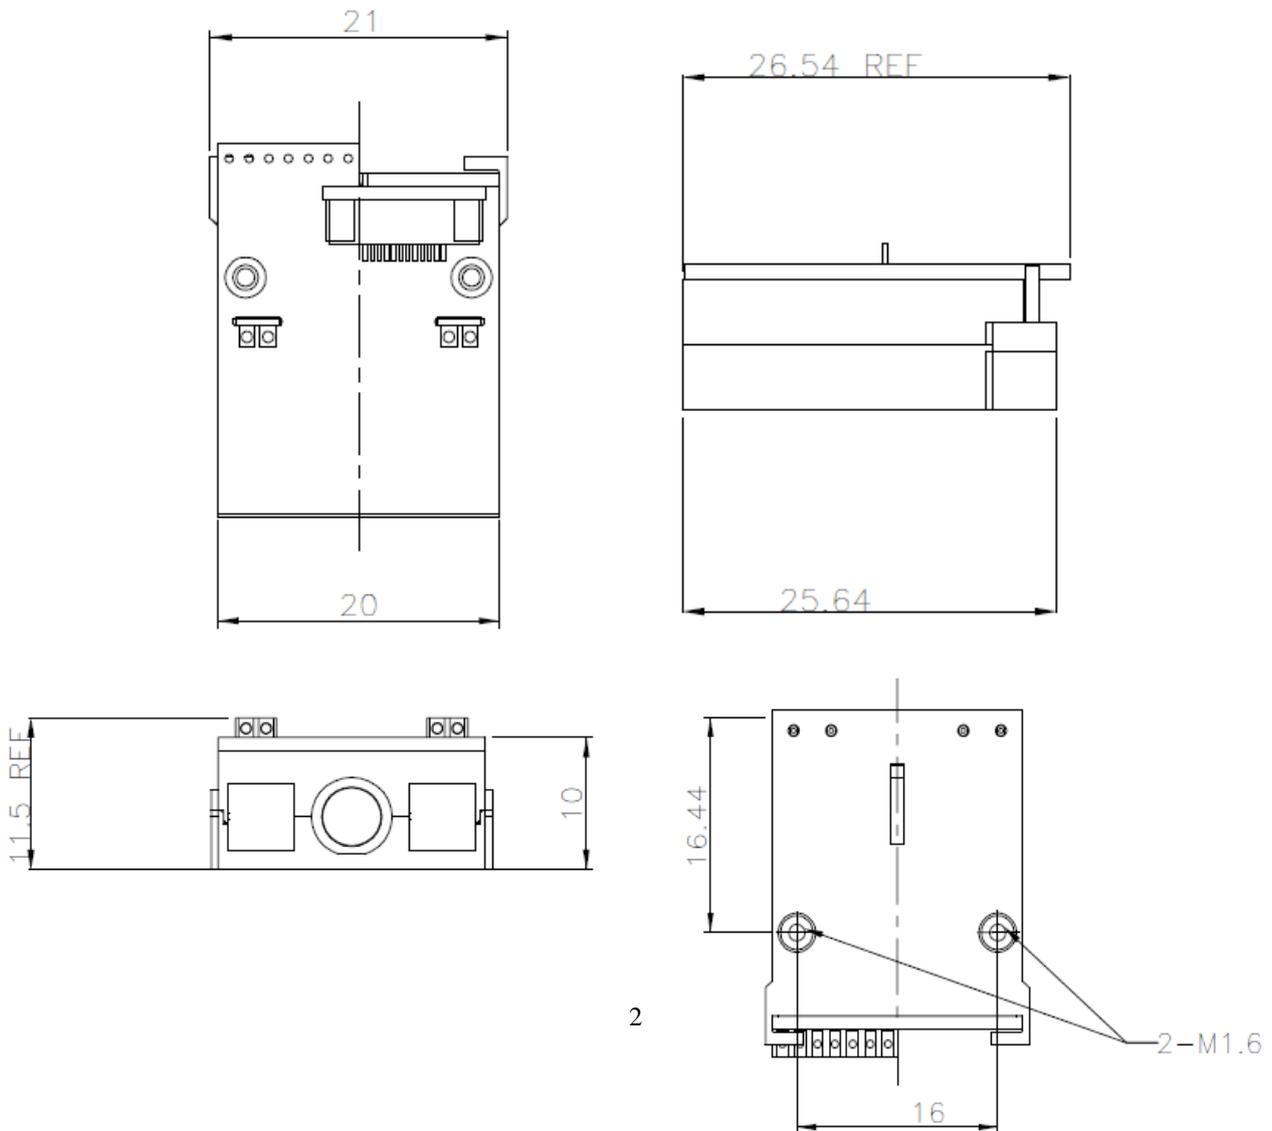


C.1.2 FPC Data Output Connector definition

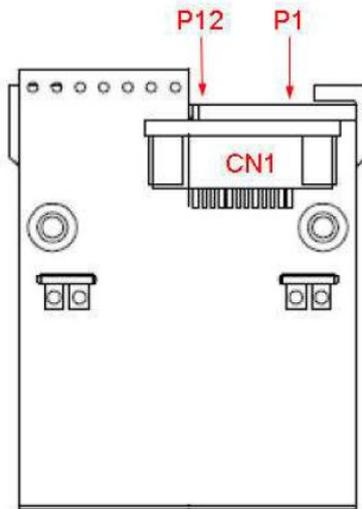


Type	FPC 12pin Pitch 0.5
Pin No.	Function
1	TG
2	AIM WAKEUP(Reserved)
3	GREEN LED
4	BZ
5	POWER DOWN(Reserved)
6	RTS
7	CTS
8	TXD (D+)
9	RXD (D-)
10	GND
11	VCC
12	Reserved

C.2 MCR14 with Interface Board Overview


C.2.1 MCR14 body with an Interface board

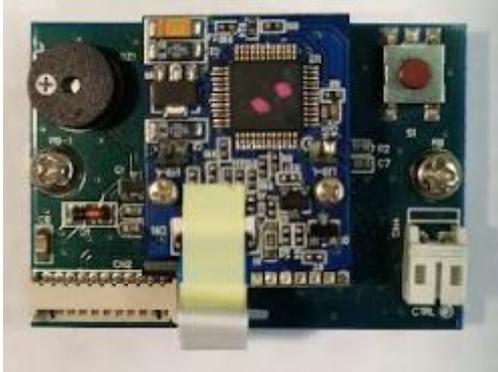

Mechanical drawing Unit : mm

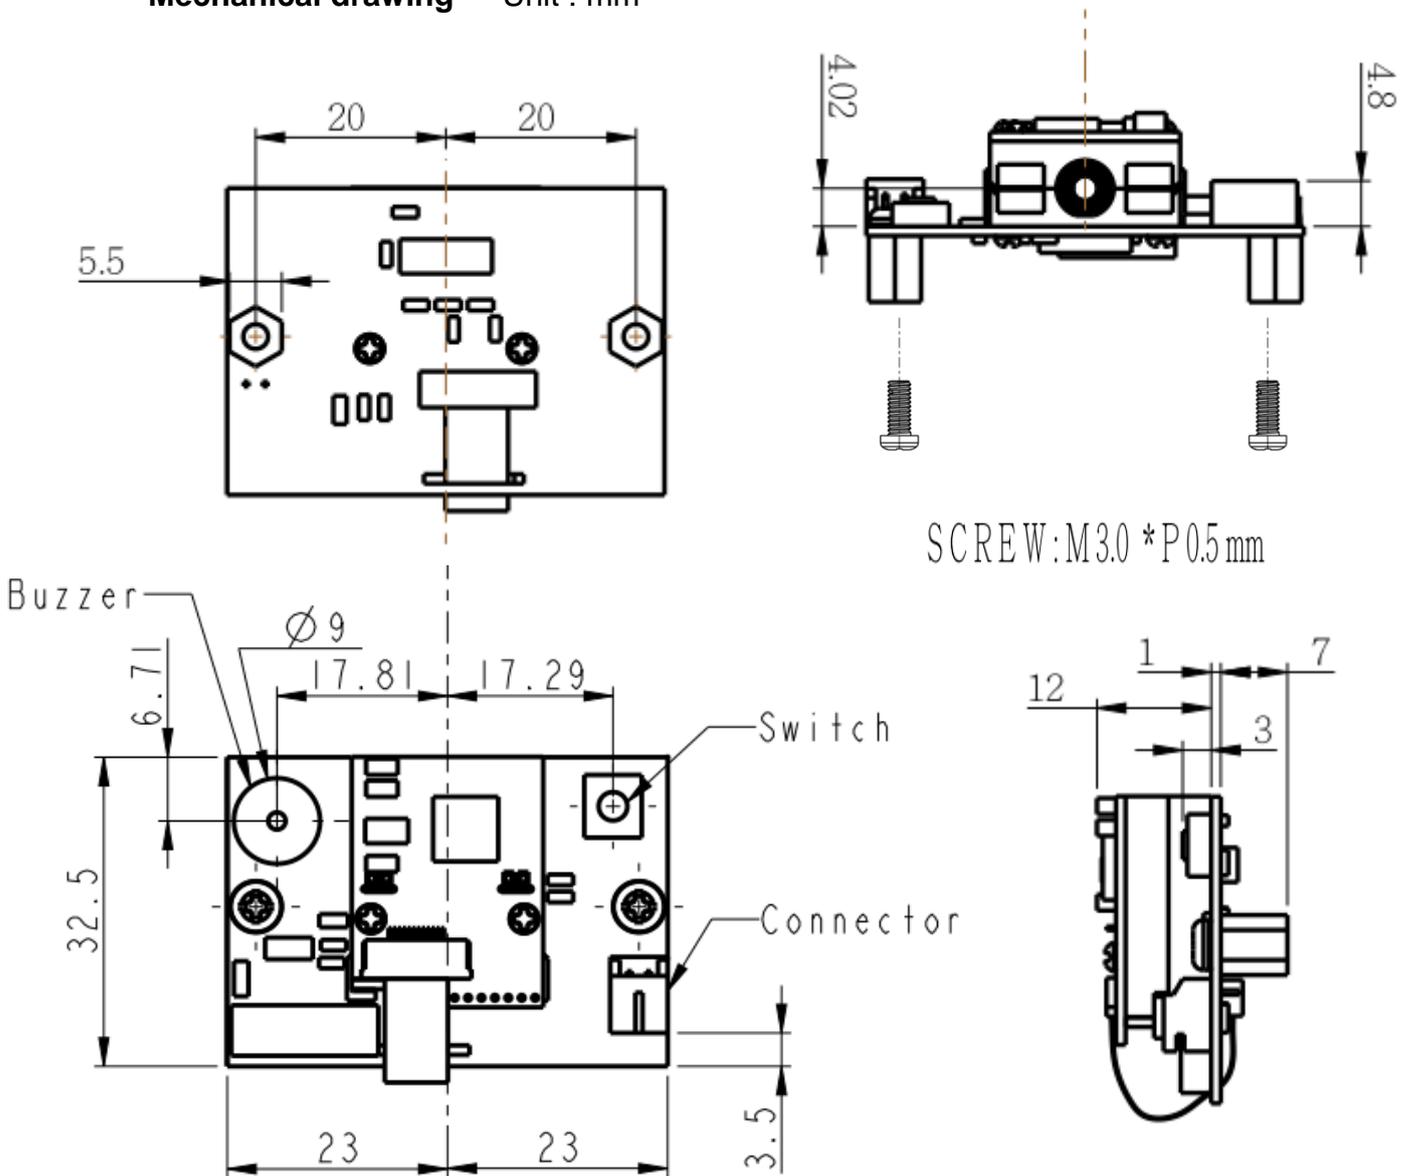

C.2.2 Two Interface cables as option to connect to your device.

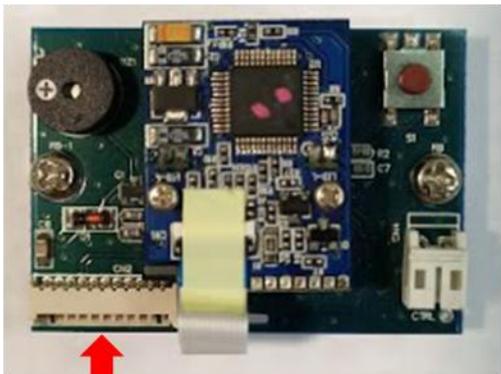

USB HID Cable

Part Number: 0114-FI50001

Note: it can also be configured as Virtual COM port



RS232 Cable

Part Number: 0116-0800031



D. Electrical Characteristics

Interface	RS232	USB
Supply Voltage		DC +5V \pm 5%
Output Voltage (Typ.)	\pm 9V	+5V \pm 5%
Output low Voltage (Max.)		0.7V
Current Draw		\pm 10%
Power On (Typ.)	170mA	170mA
Stand by (Typ.)	50mA	50mA
Operation (Typ.)	150mA	150mA

(Note: Calculated with test board)

E. Performance

Light Source	Visible Red light 632nm LED
Sensor	Linear CMOS Sensor
Processor Type	32-bit
Operating Freq.	8 MHz (Internal)
Scan Rate	Smart detection, up to 100 scans per second
Reading Distance	Up to 250mm@20mil/0.5mm, PCS90%
Print Contrast Ratio	25%
Resolution	4mil/0.1mm@PCS90%
Indicator	Beep

Reading Angle	<i>Test Conditions : Code 39, 10mil/0.25mm, PCS90%</i>
Pitch Angle	5°~60° (±5°)
Skew Tolerance	5°~60° (±5°)
Ambient Light	100,000 Lux Max.

F. Environmental

Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)
Storage Temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Relative Humidity	20% to 95% (Non-condensing)

G. Readable Symbologies

	Readable	Default Enable
All UPC/EAN/JAN	V	V
EAN128 Code	V	
Code 39	V	V
Code 39 Full ASCII	V	
Code32 / Italian Pharmacy	V	
Code 128	V	V
CODABAR/NW7	V	V
Interleave 25	V	V
Industrial 25	V	
MSI/PLESSEY	V	
Code 93	V	
China Postage	V	
GS1 DataBar	V	

H. Trigger Command

The RS-232 and USB Virtual COM command format for trigger is as following.

<STX> <TG> <ETX> <CHKSUM>

02 82 03 83 => HEX

Input 02820383 to trigger scanning.


The USB(HID) command format for trigger is as following.

CCCCC <STX> <TG> <ETX> <CHKSUM>

CCCCC 02 83 03 83 => HEX

Input CCCCC02830383 to trigger scanning.

I. Scan Map

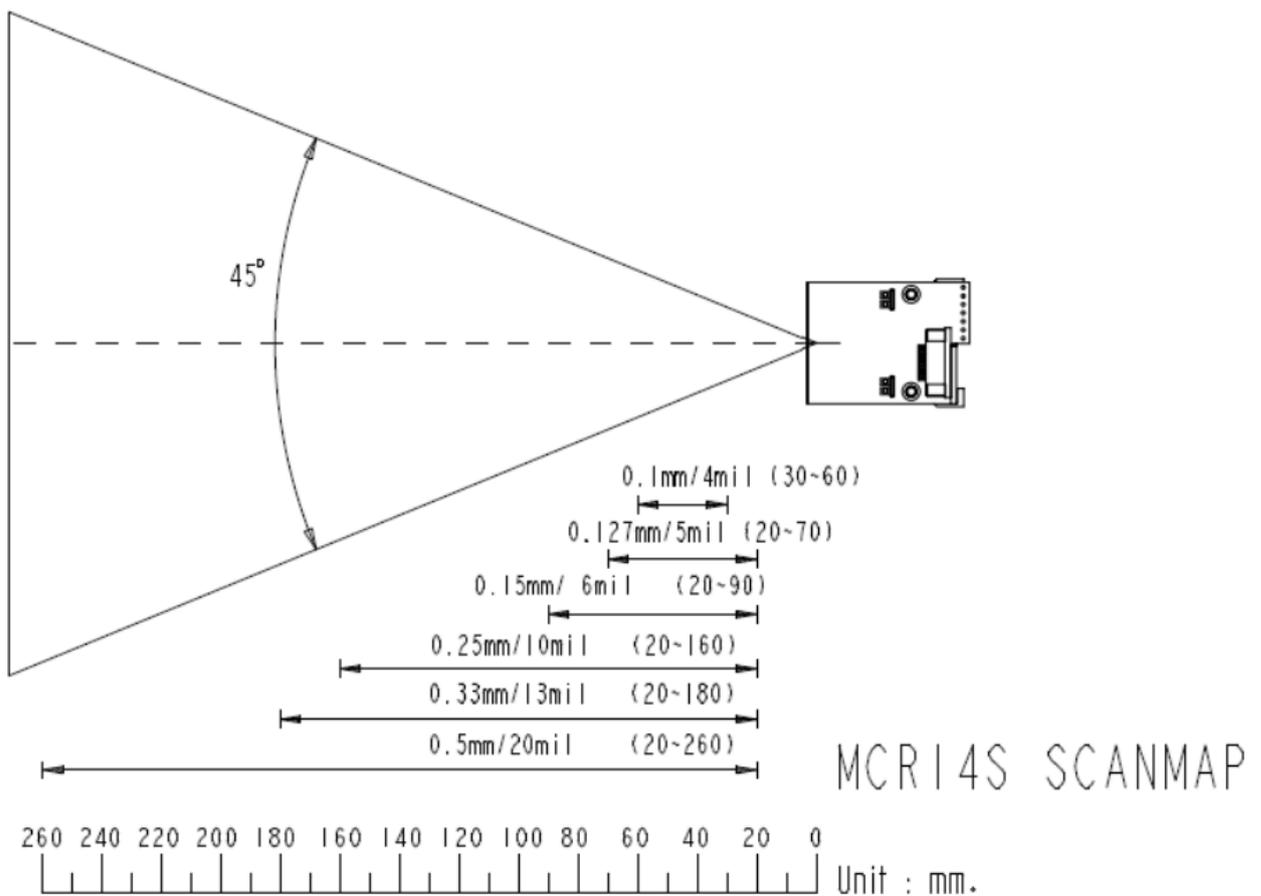

J. Reliability

Life Time	
MTBF(Calculated)	50,000 hours
Thermal Shock	
High Temp.	60 °C (140 °F)
Low Temp.	-20 °C (-4 °F)
Cycle time	30 minutes for high temp. , 30 minutes for low temp.
Cycles	24 cycles
Mechanical Shock	2000G, 0.7ms, 3 axes